

HUAWEI XH622 V3 Server Node White Paper

HUAWEI XH622 V3 Server Node White Paper

Issue 01

Date 2015-02-03

Copyright © Huawei Technologies Co., Ltd. 2015. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China

Website: <http://www.huawei.com>

Email: support@huawei.com

Contents

1 Overview.....	1
2 Appearance.....	2
3 Ports.....	5
4 Indicators.....	7
5 Physical Structure.....	9
6 Logical Structure.....	15
7 Technical Specifications.....	16
8 Features.....	18
9 Component Compatibility.....	21
10 Management.....	26
11 Warranty.....	29
12 Certifications.....	33

Figures

Figure 2-1 XH622 V3.....	2
Figure 2-2 Front view of an XH622 V3.....	3
Figure 2-3 Installation positions.....	4
Figure 3-1 High-density cable.....	6
Figure 5-1 XH622 V3 components.....	9
Figure 5-2 Positions of the connectors and other components.....	13
Figure 6-1 XH622 V3 logical structure.....	15
Figure 9-1 Processor positions.....	21
Figure 9-2 DIMM positions.....	23

Tables

Table 3-1 Ports on the XH622 V3.....	5
Table 4-1 Indicators on the panel.....	7
Table 5-1 XH622 V3 components.....	10
Table 7-1 Technical specifications.....	16
Table 9-1 Mapping between XH622 V3 DIMM configuration and operating speed.....	22
Table 9-2 Memory Channels.....	23
Table 9-3 RAID level comparison.....	24
Table 10-1 Specifications of iBMC.....	26
Table 11-1 Response time.....	29
Table 11-2 Warranty services.....	31

1 Overview

The XH622 V3 server node (XH622 V3 for short) is a two-socket dual-slot general processing unit (GPU) node for the X6800 and provides high performance and storage density while breaking through power limits. The XH622 V3 is easy to manage and maintain.


The XH622 V3 provides outstanding floating-point computing capability and high computing density based on a maximum of two dual-width GPUs and 16 double data rate 4 (DDR4) dual in-line memory modules (DIMMs). The XH622 V3 applies to high-performance computing (HPC), graphics acceleration, and game application scenarios.

2 Appearance

Appearance

Figure 1 shows the appearance of an XH622 V3.


Figure 2-1 XH622 V3

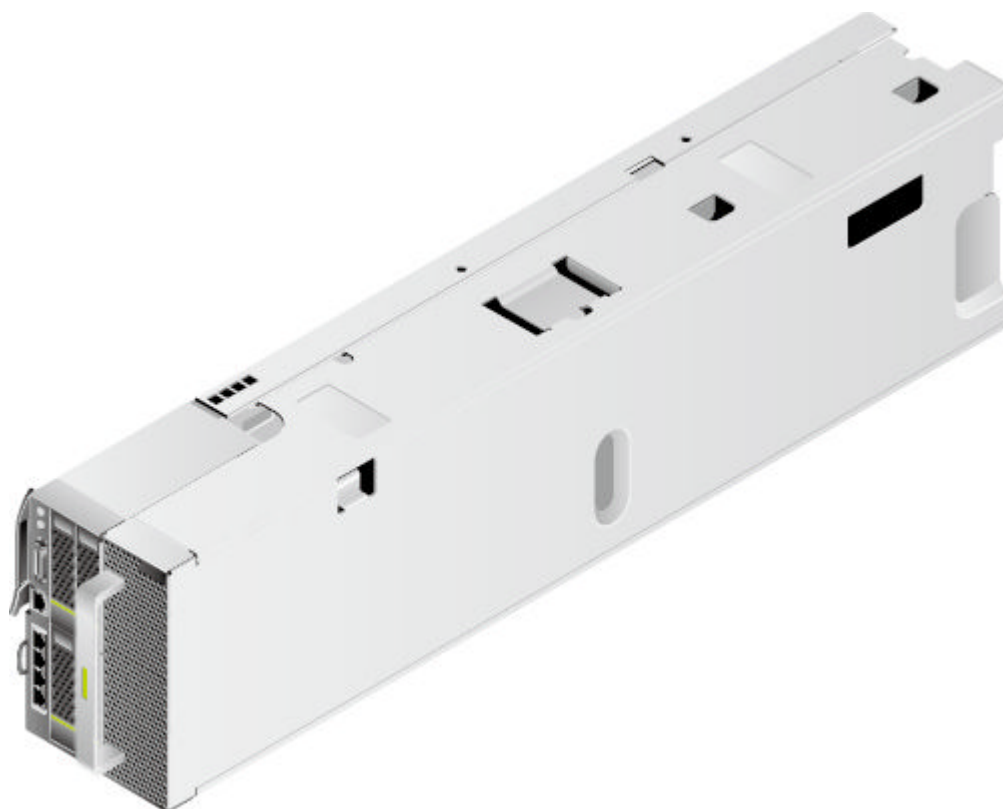

Panel

Figure 2 shows the front view of an XH622 V3.

Figure 2-2 Front view of an XH622 V3

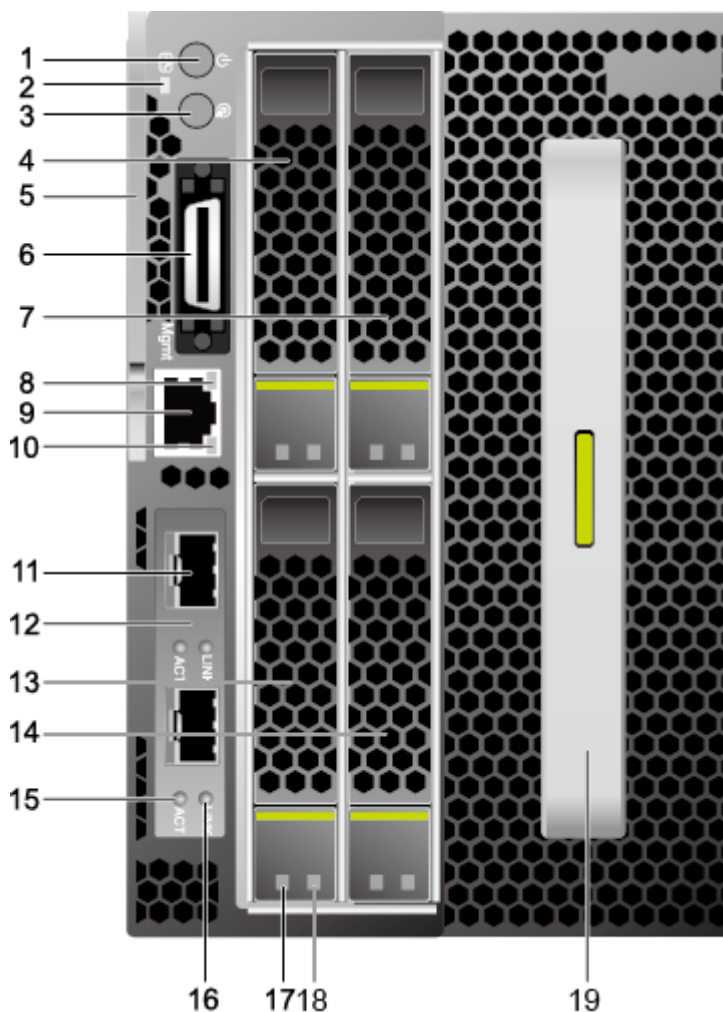

- | | | | |
|----|----------------------------|-----|--|
| 1 | Power button/indicator | 2 | Health status indicator |
| 3 | UID button/indicator | 4 | Front hard disk (HDD0) |
| 5 | Ejector lever | 6 | High-density port |
| 7 | Front hard disk (HDD2) | 8 | Management network port active indicator |
| 9 | Management network port | 10 | Management network port link indicator |
| 11 | 10GE port | 12* | Flexible NIC mezz card |
| 13 | Front hard disk (HDD1) | 14 | Front hard disk (HDD3) |
| 15 | NIC active indicator | 16 | NIC link indicator |
| 17 | Hard disk active indicator | 18 | Hard disk fault indicator |
| 19 | Ejector lever | | |

 **NOTE**


*The XH622 V3 supports two or four GE flexible NIC mezz cards, two 10GE flexible NIC mezz cards, or two 10G Base-T flexible NIC mezz cards.

Installation Positions

The XH622 V3 occupies two slots in the front of the X6800 chassis. A X6800 chassis can house a maximum of four XH622 V3s.

Figure 3 shows the installation positions and slot numbers of the XH622 V3s in the chassis.

Figure 2-3 Installation positions

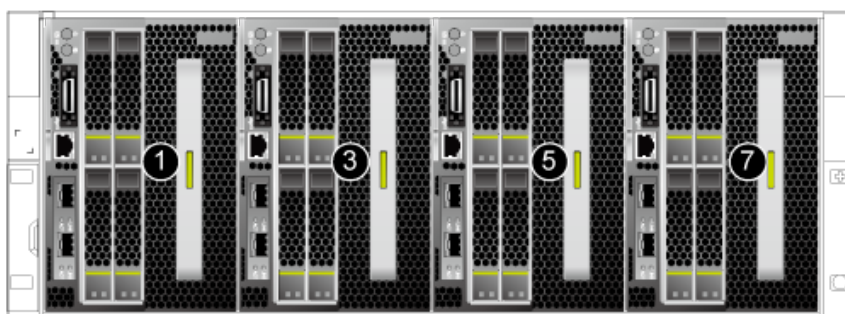

 **NOTE**

The X6800 provides eight single-width slots numbered 1-8 from left to right. If dual-width nodes are required, install them in odd-numbered slots.


3 Ports

Table 1 describes the external ports on the XH622 V3.

Table 3-1 Ports on the XH622 V3

Port	Type	Quantity	Description
High-density port	-	1	The high-density port on the front panel connects to a high-density cable that provides one DB-15 video graphics array (VGA) connector, three USB 2.0 connectors, and one RJ45 serial connector.
Flexible NIC mezz card	-	1	The front panel provides two or four GE ports, two 10GE ports, or two 10GE Base-T ports.
Management network port	RJ45	-	This 1000 Mbit/s Ethernet port is used to manage the XH622 V3. NOTE The intelligent baseboard management controller (iBMC) has two types of network ports: management network port and shared network port. A service network port with the network controller sideband interface (NCSI) function enabled can function as a shared network port.
Front hard disk port	-	4	The front panel provides four ports for 2.5-inch hard disks.
Rear PCIe port	-	-	The backplane provides two PCIe 3.0 x8 slots.

Figure 3-1 High-density cable

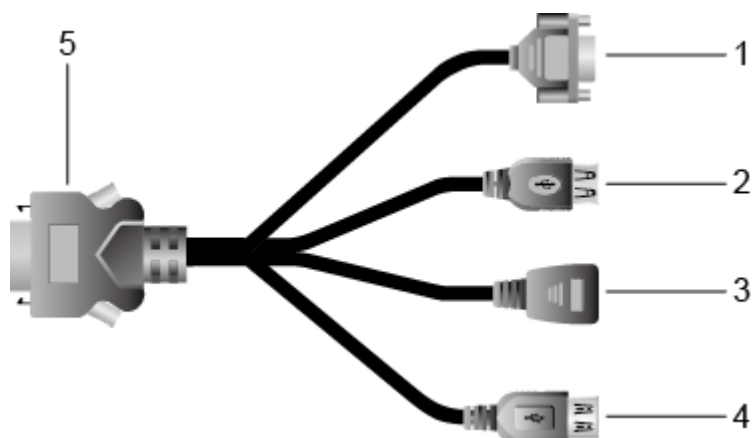


1	VGA connector	2	Two USB connectors
3	Serial connector	4	One USB connector
5	High-density connector	-	-


4 Indicators

You can observe the indicators to determine the status of the XH622 V3.

Table 1 describes the indicators on the XH622 V3 panel.

Table 4-1 Indicators on the panel

Silk Screen	Description	Color	State Description
	Power button/ indicator	Yellow and green	<ul style="list-style-type: none"> ● Off: The XH622 V3 is not powered on. ● Blinking yellow: iBMC is being started. ● Steady yellow: The XH622 V3 is to be powered on. ● Steady green: The XH622 V3 is properly powered on. <p>NOTE You can press and hold down this power button for 6 seconds to power off the XH622 V3.</p>
HLY	Health status indicator	Red and green	<ul style="list-style-type: none"> ● Off: The XH622 V3 is not powered on. ● Steady green: The XH622 V3 is operating properly. ● Blinking red at 1 Hz: A major alarm is generated. ● Blinking red at 5 Hz: A critical alarm is generated.


Silk Screen	Description	Color	State Description
	UID button/ indicator	Blue	<p>The UID button/indicator helps identify and locate a node in a rack. You can turn on or off the UID indicator by manually pressing the UID button or remotely running a command on the iBMC CLI.</p> <ul style="list-style-type: none"> ● Steady blue: The UID indicator is turned on. ● Off: The UID indicator is not turned on. ● Blinking: The XH622 V3 is located. <p>NOTE You can press and hold down this UID button for 6 seconds to reset the iBMC.</p>
-	Hard disk active indicator	Green	<ul style="list-style-type: none"> ● Off: The hard disk cannot be detected or is faulty. ● Blinking green: Data is being read from or written to the hard disk, or synchronized between hard disks. ● Steady green: The hard disk is inactive.
-	Hard disk fault indicator	Yellow	<ul style="list-style-type: none"> ● Off: The hard disk is operating properly or a hard disk in the RAID group cannot be detected. ● Blinking yellow: The hard disk is being located, or RAID is being rebuilt. ● Steady yellow: The hard disk cannot be detected or is faulty.
Network link indicator	Connectivity status indicator	Green	<ul style="list-style-type: none"> ● Off: The network port is not connected. ● Steady green: The network port is properly connected.
Network port active indicator	Data transmission indicator	Orange	<ul style="list-style-type: none"> ● Off: The network port is idle. ● Blinking orange: Data is being transmitted over the network port.

5 Physical Structure

Components

Figure 1 shows the XH622 V3 components.

Figure 5-1 XH622 V3 components

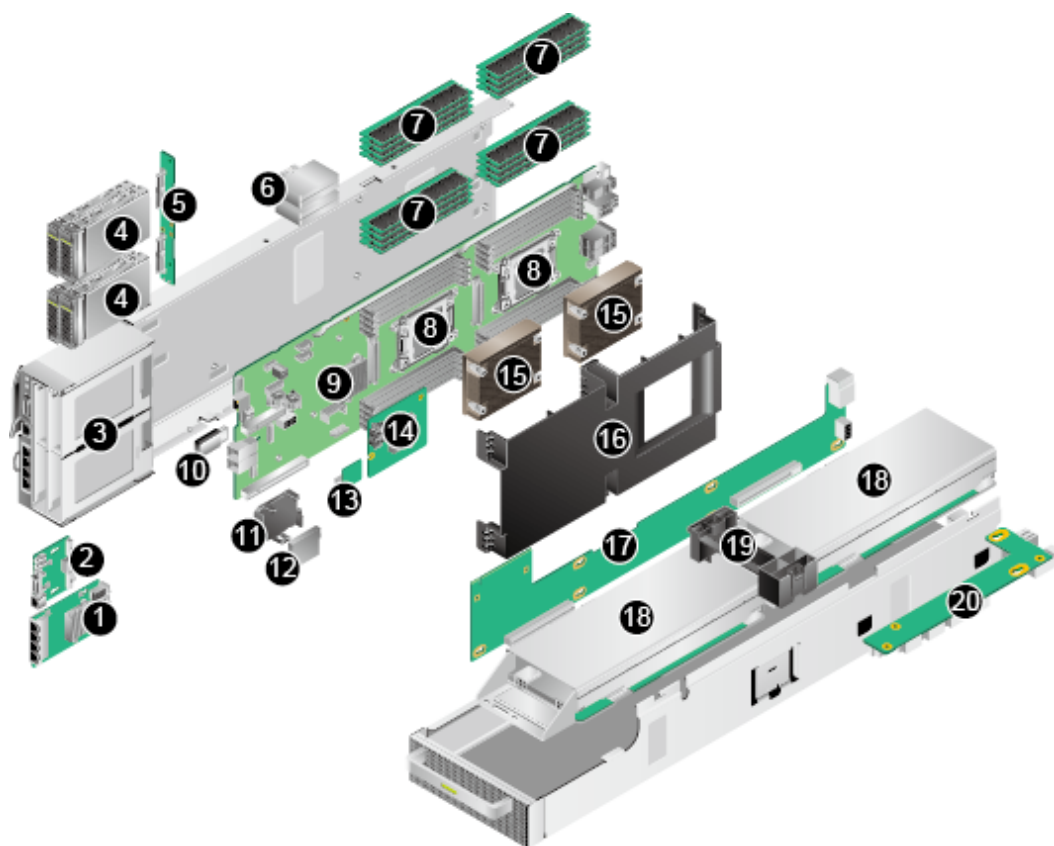

No.	Component	No.	Component
1	Flexible NIC mezz card	2	User interface board

No.	Component	No.	Component
3	Front hard disk tray	4	Front hard disk
5	Front hard disk backplane	6	SATA DOM
7	DIMM	8	Processor
9	Mainboard	10	USB flash drive
11	Supercapacitor tray	12	Supercapacitor
13	TPM	14	RAID controller card
15	Heat sink	16	Mainboard air duct
17	GPU riser card	18	GPU
19	GPU air duct	20	Power adapter board

Table 1 describes the XH622 V3 components.

Table 5-1 XH622 V3 components

No.	Name	Description
1	Flexible NIC mezz card	The front panel provides two or four flexible GE NIC mezz cards, two 10GE flexible NIC mezz cards, or two 10G Base-T flexible NIC mezz cards on the front.
2	User interface board	The user interface board provides the PWRBTN button, UID button, HLY status indicator, and management network port. This board also provides one high-density port which connects a VGA device, an RS232 serial port device, and three USB 2.0 (compatible with USB 1.1) devices by using a high-density cable.
3	Front hard disk tray	The hard disk tray accommodates front hard disks.
4	Front hard disk	Four 2.5-inch SAS/SATA HDDs or SSDs
5	Front hard disk backplane	Supports four 2.5-inch SAS/SATA HDDs or SSDs
6	SATA DOM	The SATA DOM is a SATA SSD or SATA DOM electrical hard disk. It is a quick memory storage media unit that features energy efficiency and high stability.


No.	Name	Description
7	DIMM	<ul style="list-style-type: none"> ● Up to 16 DDR4 DIMM slots (8 DIMMs per processor) for installing either RDIMMs or load-reduced DIMMs (LRDIMMs): <ul style="list-style-type: none"> - Sixteen 32 GB RDIMMs for two processors with a maximum memory capacity of 512 GB. - Sixteen 64 GB LRDIMMs for two processors with a maximum memory capacity of 1.0 TB. ● Maximum memory speed: 2133 MHz. ● Data protection measures: ECC, memory mirroring, Single Device Data Correction (SDDC), and memory sparing.
8	Processor	<ul style="list-style-type: none"> ● Number of cores per processor: 18 cores (up to 2.3 GHz), 16 cores (up to 2.3 GHz), 14 cores (up to 2.6 GHz), 12 cores (up to 2.6 GHz), 10 cores (up to 2.6 GHz), 8 cores (up to 3.2 GHz), 6 cores (up to 3.4 GHz), and 4 cores (up to 3.5 GHz). ● Number of QPI links: two. ● Maximum transmission speed per QPI link: 9.6 GT/s. ● Maximum memory speed: 2133 MHz. ● Maximum L3 cache capacity: 45 MB.
9	Mainboard	As the most important component of the server, the mainboard integrates basic components, including the BIOS chip, Platform Controller Hub (PCH) chip, and expansion slots, and provides processor sockets, DIMM slots, and slots for installing other components.
10	USB flash drive	USB removable hard disk
11	Supercapacitor tray	A supercapacitor tray holds and fastens a supercapacitor.
12	Supercapacitor	The supercapacitor provides power-off protection for the RAID controller card with the LSI SAS3108 chip.
13	Trusted Platform Module (TPM)	The TPM is a cost-effective security solution that complies with the Trusted Computing Group (TCG) standards. It enhances platform security by preventing viruses or unauthorized operations.

No.	Name	Description
14	RAID controller card	<p>The XH622 V3 supports RAID controller cards of the following models:</p> <ul style="list-style-type: none"> ● SR130: <ul style="list-style-type: none"> - Uses the LSISAS3008 chip. - Supports RAID 0, 1, 1E, and 10. - Does not provide cache data protection upon power failures. ● SR430C: <ul style="list-style-type: none"> - Uses the LSISAS3108 chip. - Provides a 1 GB or 2 GB cache. - Supports RAID 0, 1, 10, 5, 50, 6, and 60. - Provides a supercapacitor to protect cache data from power failures. - Supports a maximum of 32 hard disks. <p>These RAID controller cards support RAID state migration, RAID configuration memory, self-diagnosis, and web-based remote configuration.</p> <p>NOTE For details, see the <i>Compatibility List</i>.</p>
15	Heat sink	The heat sink cools processors. Each processor is configured with one heat sink.
16	Mainboard air duct	The main air duct is designed to optimize processor and memory heat dissipation, ensuring system reliability.
17	GPU riser card	The riser card supports two dual-slot GPUs.
18	GPU	The GPU can be provided by NVIDIA and Intel. For details, see the <i>Compatibility List</i> .
19	GPU air duct	The GPU air duct is designed to optimize GPU heat dissipation, to ensure that the GPU operates within a proper temperature range.
20	Power adapter board	The power adapter board supplies power to the GPU.

Mainboard Layout

Figure 2 shows the positions of connectors and other components on the XH622 V3 mainboard.

Figure 5-2 Positions of the connectors and other components

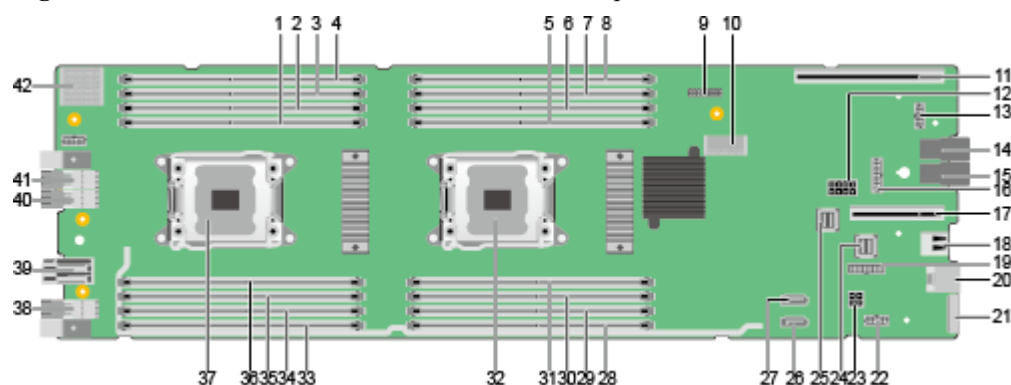


1	DDR4 connector DIMM111	2	DDR4 connector DIMM110
3	DDR4 connector DIMM101	4	DDR4 connector DIMM100
5	DDR4 connector DIMM011	6	DDR4 connector DIMM010
7	DDR4 connector DIMM001	8	DDR4 connector DIMM000
9	TPM connector	10	RAID controller card connector
11	Front PCIe x16 connector	12	Hard disk drawer power cable connector
13	Indicator cable connector for a four-disk backplane	14	Connector 1 for a flexible NIC mezz card
15	Connector 2 for a flexible NIC mezz card	16	Hard disk drawer indicator cable connector
17	Front PCIe x8 connector	18	Built-in USB 3.0 connector
19	Front panel connector 1	20	Front panel connector 2
21	Front panel connector 3	22	Indicator cable connector for a two-disk backplane
23	Power cable connector for a front hard disk backplane	24	Mini SAS HD connector A from PCH
25	Mini SAS HD connector B from PCH	26	SATADOM connector 1
27	SATADOM connector 2	28	DDR4 connector DIMM020
29	DDR4 connector DIMM021	30	DDR4 connector DIMM030
31	DDR4 connector DIMM031	32	CPU socket 1
33	DDR4 connector DIMM120	34	DDR4 connector DIMM121
35	DDR4 connector DIMM130	36	DDR4 connector DIMM131
37	CPU socket 2	38	Backplane signal connector 1

39	Backplane power connector	40	Backplane signal connector 2
41	Backplane signal connector 3	42	Side GPU enclosure connector

6 Logical Structure

Figure 1 shows the logical structure of the XH622 V3.

Figure 6-1 XH622 V3 logical structure

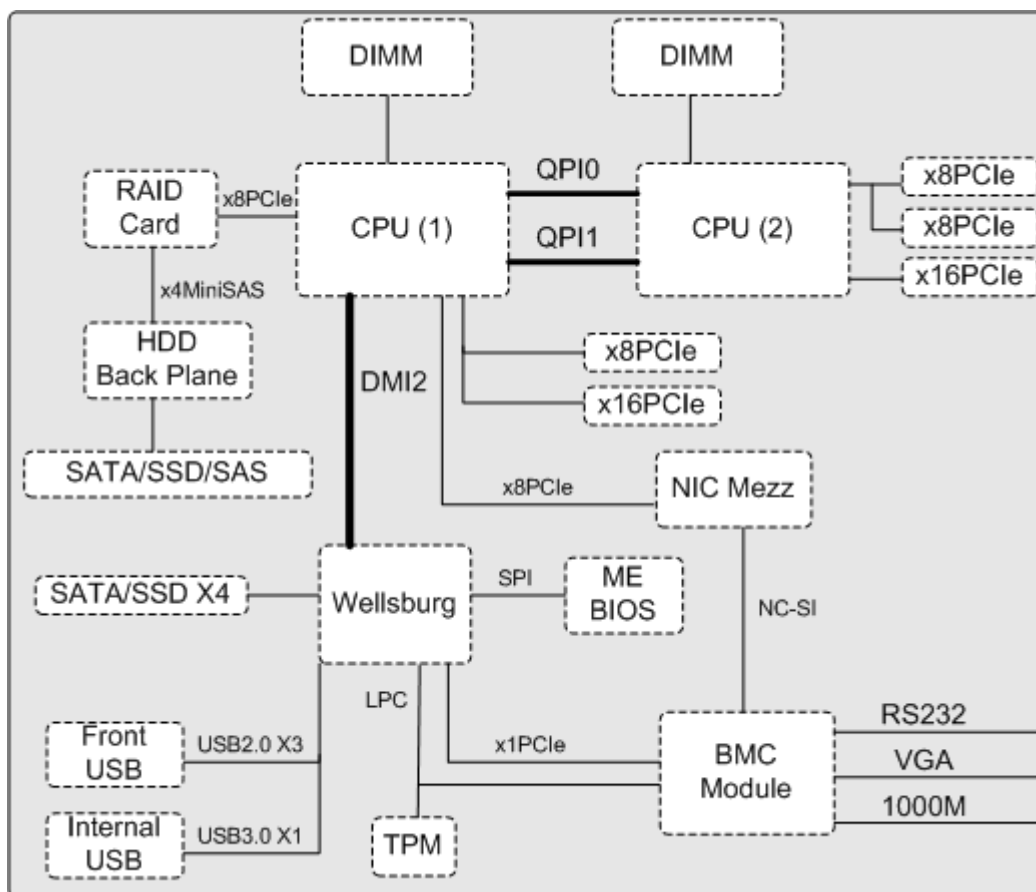

7 Technical Specifications

Table 1 describes the technical specifications of the XH622 V3.

Table 7-1 Technical specifications

Category	Item	Specifications
Mechanical specifications	Dimensions (H x W x D)	166.2 mm × 108.8 mm × 670 mm (1.61 in. x 8.27in. x 26.38 in.)
	Weight	Net weight: 10kg (22.04 lb)
Environmental specifications	Temperature	<ul style="list-style-type: none"> ● Operating temperature: 5°C to 40°C (41° F to 104°F) ● Storage temperature: -40°C to +65°C (-40°F to +149°F) <p>NOTE The XH622 V3 supports the highest operating temperature of 30°C (86) when one fan fails.</p>
	Temperature change rate	20°C/h (36°F/h)
	Humidity	<ul style="list-style-type: none"> ● Operating humidity: 8% RH to 90% RH (non-condensing) ● Storage humidity: 5% RH to 95% RH (non-condensing)
	Altitude	≤ 3000 m (9842.40 ft) When the altitude is higher than 900 m (2952.72 ft), the operating temperature decreases by 1°C (1.8°F) per 300 m (984.24 ft).
Input power specifications	Rated input voltage	12 V DC

Category	Item	Specifications
Power consumption	Power consumption in typical configuration	≤ 600 w
Reliability	Mean time to repair (MTTR)	138s
	Mean time between failures (MTBF)	228110h

 **NOTE**

The number of the XH622 V3s in each X6800 chassis varies depending on the XH622 V3 configurations and power supply capacity of the equipment room. For details, consult the local Huawei sales representatives.

8 Features

Balanced Performance

The XH622 V3 provides the following performance features:

- The XH622 V3 uses the 18-core Intel® Xeon E5-2600 v3 processor to provide excellent system processing performance with the 3.5 GHz dominant frequency, 45 MB L3 cache, and two 9.6 GT/s QPI links between processors.
- Each XH622 V3 supports two processors, 36 cores, and 72 threads, which maximizes the concurrent execution of multithreaded applications.
- The XH622 V3 supports 1.2 V DDR4 DIMMs. 1.2 V DDR4 DIMMs consume 20% less power than 1.35 V DDR3L DIMMs.
- The XH622 V3 supports up to sixteen 2133 MHz DDR4 LRDIMMs to provide a maximum of 1 TB memory capacity. The maximum theoretical memory bandwidth is 136.5 GB/s, ensuring high speed. The LRDIMMs adopt error checking and correcting (ECC) technology, ensuring high availability.
- Intel Turbo Boost Technology 2.0 allows processor cores to run faster than thermal design power (TDP) configuration specified frequency if they are operating below power, current, and temperature specification limits.
- Intel hyper-threading technology enables each processor core to run up to two threads, improving parallel computing capacity.
- The hardware-assisted Intel® Virtualization Technology (Intel® VT) allows operating system (OS) vendors to better use hardware to address virtualized workloads.
- Integrated with the Intel Advanced Vector Extensions 2.0 (AVX 2.0) instruction set, the XH622 V3 improves floating-point computing performance for compute-intensive applications.
- The XH622 V3 supports two dual-width GPGPUs with the floating-point computing performance five times than that of the x86 processors.
- The XH622 V3 supports flexible configurations of onboard NIC mezz cards, and provides a variety of network ports.
- The Intel polynomial-time approximation scheme (PTAS) technology helps customers manage.

Availability and Serviceability

The XH622 V3 provides the following features to improve availability and serviceability:

- The XH622 V3 uses carrier-class components and follows the engineering process to dramatically improve system reliability.
- The XH622 V3 uses four 2.5-inch hot-swappable hard disks. It supports RAID 0, 1, 1E, 5, 6, 10, 50, and 60, depending on the RAID controller card. It offers a RAID cache. A supercapacitor is used to protect RAID cache data from power failures.
- The UID and HLY indicators on the front panel, and iBMC web user interface (WebUI) help technical support personnel learn about the status of key components and promptly locate failed or failing components. This simplifies maintenance, accelerates troubleshooting, and helps improve system availability.
- SSDs offer better reliability than HDDs, prolonging system uptime.
- The Huawei iBMC monitors system parameters in real time, triggers alarms, and performs recovery actions in case of failures. This minimizes system downtime.
- For XH622 V3s used in China, Huawei provides a three-year warranty for parts replacement and limited onsite repair, as well as a 9-hour-a-day, 5-day-a-week Next Business Day (NBD) support program with optional service upgrades.
- For XH622 V3s used outside China, Huawei provides a three-year warranty for parts replacement and repair, as well as a 9-hour-a-day, 5-day-a-week NBD support program. Huawei delivers the repaired or new parts within 45 calendar days after receiving the defective parts.

Manageability and Security

The XH622 V3 provides the following features to ensure manageability and security:

- The built-in management module iBMC monitors server operating status and provides remote management.
- The integrated industry-standard Unified Extensible Firmware Interface (UEFI) increases setup, configuration, and update efficiency, and simplifies fault handling.
- The optional TPM 1.2 provides advanced encryption functions, including digital signatures and remote authentication.
- The Intel Advanced Encryption Standard–New Instruction (AES NI) supports faster and stronger encryption.
- The Intel Execute Disable Bit (EDB) function prevents certain types of malicious buffer overflow attacks when working with a supported OS.
- The NCSI feature supports multiplexing of management and service network ports, maximizing return on investment (ROI).
- NCSI can be enabled or disabled using iBMC or the basic input/output system (BIOS). NCSI is disabled by default.

 **NOTE**

The service network port supporting NCSI has the following features:

- The service network port can be bound to the network port (NIC mezz) on the onboard NIC of the server or any network port (host network port 1 by default) on the onboard card.
- The service network port allows you to enable, disable, and configure a virtual local area network (VLAN) ID. A VLAN ID is disabled by default. The default VLAN ID is 0.
- The service network port supports IPv4 and IPv6 addresses. You can set an IP address, subnet mask, default gateway, and IPv6 address prefix length for the service network port.

Energy Efficiency

The XH622 V3 provides the following features to ensure high energy efficiency.

- The Intel® Xeon E5-2600 v3 series processors provide better performance over the previous-generation processors while fitting into the same TDP.
- The XH622 V3 supports 80 Plus Platinum PSUs with different power levels. The PSUs provide 94% power efficiency at 50% loads.
- The efficient voltage regulator down (VRD) PSUs reduce the loss in DC/DC power conversion.
- Intel Intelligent Power Capability allows a single processor to be powered on or off based on site requirements.
- Low-voltage Intel® Xeon processors consume less energy and apply to the data centers and telecommunication environments that have power and thermal limitations.
- 1.2 V DDR4 registered DIMMs (RDIMMs) consume 20% less power than 1.5 V DDR3 RDIMMs.
- SSDs consume 80% less power than HDDs.
- The XH622 V3 supports intelligent processor frequency adjustment, decreasing power consumption.
- Hexagonal ventilation holes on the front panel enable higher ventilation density than round holes, increasing system cooling efficiency.

9 Component Compatibility


For details about the components supported by the XH622 V3, see the *Compatibility List*.

Processor

The XH622 V3 supports up to two Intel® Xeon E5-2600 v3 series processors.

- If two processors are required, use the same type of processors.
- If only one processor is required, it must be installed in socket CPU1. See [Figure 9-1](#).

Figure 9-1 Processor positions

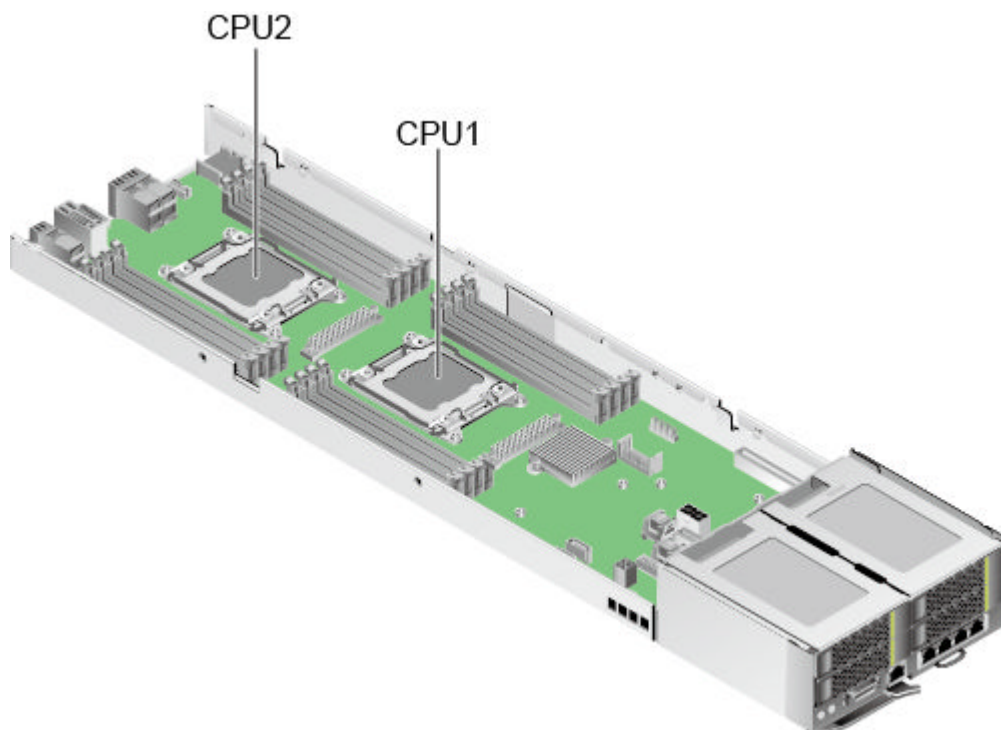

Memory

Memory Configuration Rules

The XH622 V3 supports a maximum of eight DIMMs if one processor is installed and supports a maximum of 16 DIMMs if two processors are installed. Each processor comes with four memory channels.

Observe the following rules when configuring DIMMs:

1. The XH622 V3 does not support mixed use of different types of DIMMs. Use either RDIMMs or LRDIMMs.
2. Each memory channel supports a maximum of eight ranks.

 **NOTE**

A memory channel supports more than eight ranks for LRDIMMs and the number of ranks is counted based on the number of ranks of the external ports. The DIMMs in the *Compatibility List* support all memory channels in full configuration.

3. All DIMMs in a server operate at the same speed, which is determined as the lowest value of:
 - Memory speed supported by a specified processor
 - Memory speed supported by a specified DIMM
 - For the maximum operating speed for the specific memory configuration, see "Maximum Operating Speed" in Table 1.

Table 9-1 Mapping between XH622 V3 DIMM configuration and operating speed

Item	RDIMM		LRDIMM	
	1DPC	2DPC	1DPC	2DPC
Rank	1DPC	2DPC	1DPC	2DPC
Operating voltage (V)	1.2	1.2	1.2	1.2
Maximum operating speed (MHz)	2133	1866	2133	2133
NOTE In 2DPC, a RDIMM supports POR+1 and the operating speed of 2133 MHz.				


Memory Slot Configuration Rules

- The XH622 V3 supports DIMMs of 4 GB, 8 GB, 16 GB, 32 GB, and 64 GB. When the XH622 V3 is fully configured with DIMMs, the maximum memory capacity is 1 TB.
- The XH622 V3 provides 16 DDR4 DIMM slots for installing DDR4 DIMMs. Each processor integrates four memory channels. Four memory channels for the processor in socket CPU1 are 1A, 1B, 1C, and 1D, and those for the processor in socket CPU2 are 2A, 2B, 2C, and 2D. [Table 9-2](#) describes the composition of each memory channel. [Figure 9-2](#) shows the DIMM installation positions.

Table 9-2 Memory Channels

Processor	Memory Channels	Composition
CPU1	1A	DIMM000(A)
		DIMM001(E)
	1B	DIMM010(B)
		DIMM011(F)
	1C	DIMM020(C)
		DIMM021(G)
	1D	DIMM030(D)
		DIMM031(H)
CPU2	2A	DIMM100(A)
		DIMM101(E)
	2B	DIMM110(B)
		DIMM111(F)
	2C	DIMM120(C)
		DIMM121(G)
	2D	DIMM130(D)
		DIMM131(H)

Figure 9-2 DIMM positions

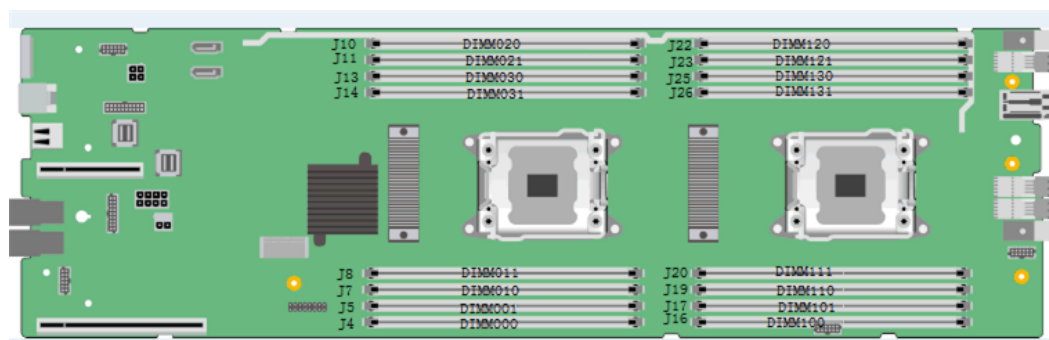

The DIMMs must be installed in the sequence specified in the following table.

Processor	DIMM Installation Sequence
Processor 1	DIMM000(A), DIMM010(B), DIMM020(C), and DIMM030(D) DIMM001(E), DIMM011(F), DIMM021(G), and DIMM031(H)

Processor	DIMM Installation Sequence
Processors 1 and 2	DIMM000(A), DIMM100(A), DIMM010(B), DIMM110(B) DIMM020(C), DIMM120(C), DIMM030(D), and DIMM130(D) DIMM001(E), DIMM101(E), DIMM011(F), and DIMM111(F) DIMM021(G), DIMM121(G), DIMM031(H), and DIMM131(H)

Memory Protection

The XH622 V3 supports the following memory protection technologies:

- ECC
- SDDC
- Memory mirroring
- Memory sparing
- Lockstep
- Patrol scrambling

Storage System

The XH622 V3 supports a maximum of four 2.5-inch hot-swappable SAS HDDs, SATA HDDs, or SSDs.

Table 2 describes the RAID level comparison.

Table 9-3 RAID level comparison

RAID Level	Reliability	Read Performance	Write Performance	Minimum Number of Hard Disks	Hard Disk Utilization
RAID 0	Low	High	High	1	100%
RAID 1	High	Low	Low	2	1/N
RAID 5	Relatively high	High	Medium	3	(N – 1)/N
RAID 6	Relatively high	High	Medium	4	(N – 2)/N
RAID 10	High	Medium	Medium	4	M/N
<i>N</i> indicates the number of member disks in a RAID group. <i>M</i> indicates the number of subgroups of a RAID group.					

The table is for reference only. For details about the components that can be purchased, consult the local Huawei sales representatives.

10 Management

The XH622 V3 uses Huawei's proprietary iBMC intelligent management system (iBMC for short) to implement remote server management. iBMC complies with IPMI V2.0 specifications and provides reliable hardware monitoring and management.

iBMC supports the following features and protocols:

- KVM and text console redirection
- Remote virtual media
- IPMI V2.0
- Simple Network Management Protocol version 3 (SNMPv3)
- Common Information Model (CIM)
- Login by using a web browser

Table 1 describes the specifications of iBMC.

Table 10-1 Specifications of iBMC

Item	Description
Management interface	Integrates with any standard management system through the following interfaces: <ul style="list-style-type: none">● IPMI V2.0● CLI● SM_CLP● HTTPS● SNMPv3● Web Services-Management (WS-MAN)
Fault detection	Detects faults and accurately locates faults in hardware, accurate to field replaceable units (FRUs).

Item	Description
Alarm management	Supports alarm management functions and reports alarms using the SNMP trap, Simple Mail Transfer Protocol (SMTP), and syslog service.
Integrated virtual KVM	Provides remote maintenance measures for troubleshooting the system. Supports a maximum resolution of 1920 x 1200.
Integrated virtual media	Virtualizes local media devices, images, USB keys, and folders to media devices on a remote server, simplifying OS installation. (The virtual DVD drive supports a maximum transmission rate of 8 MB/s.)
WebUI	<p>Provides a user-friendly graphical user interface (GUI), which simplifies users' configuration and query operations.</p> <p>The iBMC WebUI supports the following web browsers:</p> <ul style="list-style-type: none"> ● Internet Explorer 8.0 ● Mozilla Firefox 9.0 ● Google Chrome 13.0 ● Safari
Fault reproduction	Reproduces faults to facilitate system crash diagnosis.
Screen snapshots and videos	Allows you to view screen snapshots and videos without login, which facilitates routine preventive maintenance inspection (PMI).
Domain name service (DNS) and directory service	Supports the DNS and directory service, which significantly simplifies network and configuration management.
Dual-image backup	Starts software from a backup image if the software fails.
Assets management	Provides intelligent assets management.
Intelligent power management	Uses the power capping technology to increase deployment density, and uses dynamic energy saving to lower operating expenses.
IPv6	Supports IPv6 to ensure sufficient IP addresses.

Item	Description
NCSI	Supports NCSI, which allows you to access iBMC over the service network port.

11 Warranty

According to the *Huawei Warranty Policy for Servers & Storage Products (Warranty Policy for short)*, Huawei provides a three-year warranty for the XH622 V3, a one-year warranty for DVD-ROM drives and iBBUs, and a three-month warranty for software media.

The *Warranty Policy* stipulates warranty terms and conditions, including the available services, response time, terms of service, and disclaimer.

The warranty terms and conditions may vary by country,

and some service and/or parts may not be available in all countries. For more information about warranty services in your country, contact Huawei technical support or the local Huawei office.

Table 1 describes the warranty service response time.

Table 11-1 Response time

Service	Response Time	Description	Remarks
Help Desk	24/7	Available 24 hours a day, 7 days a week (00:00 to 24:00, Monday to Sunday)	None

Service	Response Time		Description	Remarks
Remote troubleshooting			Available 24 hours a day, 7 days a week (00:00 to 24:00, Monday to Sunday)	The response time starts from the time when Huawei technical support accepts a customer's service request to the time when the technical support contacts the customer the first time to provide remote troubleshooting services.
Online technical support			Huawei enterprise support website: available 24 hours a day, 7 days a week (00:00 to 24:00, Monday to Sunday)	None
Licensing of software updates			Huawei enterprise support website: available 24 hours a day, 7 days a week (00:00 to 24:00, Monday to Sunday)	None
Return for repair	Outside China	9/5 hours, shipment within 45 calendar days	Available 9 hours a day, 5 days a week (09:00 to 18:00, Monday to Friday), excluding official holidays	The repaired or replacement parts will be shipped within 45 calendar days after Huawei receives the defective parts.

Service	Response Time		Description	Remarks
	In China	9/5 hours, next business day	Available 9 hours a day, 5 days a week (09:00 to 18:00, Monday to Friday), excluding official holidays	Service requests submitted after 15:30 will be handled the next workday.

Table 2 describes the warranty services provided by Huawei.

Table 11-2 Warranty services

Service	Description
Help Desk	Huawei provides 24-hour after-sales technical support (such as handling requests for troubleshooting and hardware repair), receives and handles customer inquiries, complaints, and suggestions through a dedicated hotline.
Remote troubleshooting	After receiving a service request for rectifying a network or system fault, Huawei engineers will first analyze and handle the fault remotely and proceed to rectify it in the shortest possible time. There are two methods for remote troubleshooting: telephone support and remote access.
Online technical support	Huawei enterprise support website (http://enterprise.huawei.com) provides product and technical materials, such as product manuals, configuration guides, networking case study, and maintenance experience collections. Registered users can access the website and download required documents.
Licensing of software updates	To ensure that the devices operate stably, Huawei provides software patches whenever necessary.

Service	Description
Return for repair	<p>Huawei provides repair or replacement services for customers within the promised time to meet customer needs for spare parts. You can return defective parts to the designated Huawei site after submitting a service request.</p> <p>Huawei provides a three-year warranty for parts replacement and onsite repair for the XH622 V3 used in China. Huawei provides a 9-hour-a-day, 5-day-a-week NBD support program.</p> <p>Huawei provides a three-year warranty for parts replacement and repair for the XH622 V3 used outside China. Huawei provides a 9-hour-a-day, 5-day-a-week NBD support program. Huawei delivers the repaired or new parts within 45 calendar days after receiving the defective parts.</p>

12 Certifications

For the certifications passed by the XH622 V3 and the standards to which the XH622 V3 conforms, see the *HUAWEI X6800 High-Density Server White Paper*.