


Data Sheet

LoadMaster™ 3400

- Application Delivery Optimization
- · Server Load Balancing
- TLS (SSL) Acceleration

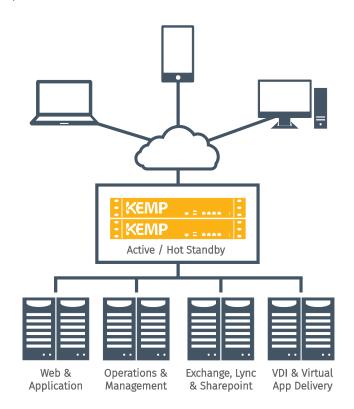

FEATURE	BENEFIT
High Performance L4/7 Server Load Balancing	Ensures each user gets the best application experience possible.
Active/Hot-Standby, with Stateful Failover	Removes load balancer as a single point of failure
Server and application health checking	Guarantees user requests will be only be directed to available severs and available applications
IP and L7 persistence	Maintain connections with the user's specific server even if their IP address changes during session
Layer 7 content switching	Optimize server traffic according to content type
TLS (SSL) acceleration and offload	Optimizes server performance and user experience for encrypted application content
Compression and caching of content	Reduces internal network latency and optimizes bandwidth for best possible client experience
Intrusion Prevention Systems (IPS)	Thwarts application threats in both non-encrypted and encrypted traffic streams



Intelligent Application Delivery for Growing Organizations

Agile organizations require end-to-end technology deployments that can support them as their application performance requirements grow. KEMP's LoadMaster™ 3400 delivers comprehensive performance scaling to 3.4 Gbps application throughput and 2000 SSL transactions per second (TPS) combined with content switching, data compression and caching to meet the needs of dynamic, expanding infrastructures.

The LoadMaster 3400 is an essential component to include for high availability of critical line of business applications, internet facing web services and corporate intranets in small to medium sized deployments.

Combining the latest advancements in Layer 4 to Layer 7 application delivery technology with features such as user authentication and authorization, LoadMaster™ is the ADC of choice for providing high availability services across a wide range of application workloads.



LoadMaster™ 3400

Specifications version 7.1

Standard

- Server Load Balancing (SLB) for TCP/UDP based protocols
- TLS (SSL) acceleration and offload
- Layer 7 content switching
- Advanced application transparent HTTP/HTTPS caching
- Optimized compression of static and dynamic HTTP/HTTPS content
- SNORT-rule compatible Layer 7 intrusion prevention system (IPS)
- Up to 256 virtual and 1000 real servers
- IPv6 support
- IPv6 IPv4 bidirectional conversion
- NAT-based forwarding
- Direct Server Return (DSR)
- Session reconnection for Microsoft remote desktop services (RDS)
- Configurable S-NAT
- VLAN Trunking (802.1Q)
- Link interface bonding (802.3ad)
- HTTP/2 Layer 7 Proxy

Edge Security Pack

- Microsoft TMG replacement
- Pre-Authentication & SSO
- Multi-Domain authentication
- X.509 client certificate authentication
- Custom login forms
- Two factor authentication

Performance

- Max L4 Throughput Up To 3.6Gbps
- Max L7 Throughput Up To 3.4Gbps
- Max Interface Throughput 4 X 949.2Mbps
- 69,000 L7 (http) requests per second
- 100,000 L7 concurrent connections
- 8,600,000 L4 concurrent connections
- SSL Acceleration
 - o 2K Keys up to 2,000 TPS
 - o 1K keys up to 4,000 TPS
- TCP/IP Multiplexing

TLS (SSL)

- Configurable TLS (1.0, 1.1, 1.2) and SSL (2.0, 3.0)
- Support for EV (Extended Validation) certificates
- Server Name Identification (SNI) support
- Up to 256 TLS (SSL) certificates
- Automated TLS (SSL) certificate chaining
- TLS (SSL) Certificate Signing Request (CSR) generation
- STARTTLS offload for mail protocols (POP3, SMTP, IMAP)
- FIPS 140-2 Level 1 mode

Health Checking & High Availability

- Aggregated health checks
- ICMP health checking
- Layer 7 checking against any target server port
- Active/Hot Standby configurations for High Availability
- Stateful Failover

Administration

- Change Auditing
- Flexible administration Options
 - o Web User Interface (WUI)
 - o SSH
 - o Console
 - o RESTful, JAVA and PowerShell APIs
 - o VMware vRealize Orchestrator
- Wizards for simplified deployment
- Context based help (WUI)
- Real time display of performance and availability
- Application templates
- Remote syslogd support
- Automated configuration backup
- Selective restore of configuration
- Connection draining
- Comprehensive logging and reporting
- SNMP support
- Diagnostic shell with in-line tcpdump

Scheduling and Balancing Methods

Data Sheet

- Round Robin
- Weighted Round Robin
- Least Connection
- Weighted Least Connection
- Agent-based Adaptive
- Chained Failover (Fixed Weighting)
- Source-IP Hash
- Layer 7 Content Switching
- Global Server Load Balancing (GSLB)
- AD Group based traffic steering

Session Persistence

- Source IP (L4)
- TLS (SSL) SessionID (L4)
- HTTP/HTTPS Browser-session (L7)
- HTTP/HTTPS WebClient-session (L7)
- RDP Login ID (L7)
- Port Following for mixed HTTP/HTTPS sessions

Security

- SNORT-Rule Compatible L 7 Intrusion Prevention System (IPS)
- Permit / Deny Access Control Lists
- IP address filtering
- DDoS mitigation, including L7 rate based attacks
- IPSec VPN to Azure, AWS and vCloud Air public clouds
- Authenticated NTP

Hardware Platform

- Intel Dual Core Processor
- 8 X GbE Auto-negotiating, Full Duplex ports
- Solid State Storage
- 4 GB RAM
- Local admin via serial and VGA/USB
- Dimension: 426mm (W) x 365mm (D) x 44mm (H)
- Weight: 15.4lbs (7kg)
- 200W ATX power supply

^{*} Specifications are subject to change without prior notice.